

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number
WO 2004/010704 A1

(51) International Patent Classification⁷: **H04N 7/30**

(74) Agent: **CHAFFRAIX, Jean**; Société Civile SPID, 156 Boulevard Haussmann, F-75008 Paris (FR).

(21) International Application Number:
PCT/IB2003/003062

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 9 July 2003 (09.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02291873.4 24 July 2002 (24.07.2002) EP

(71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **MARQUANT, Gwennaelle** [FR/FR]; 156 Boulevard Haussmann, F-75008 Paris (FR). **JUNG, Joel** [FR/FR]; 156 Bd Haussmann, F-75008 Paris (FR).

Published:

— with international search report

[Continued on next page]

(54) Title: METHOD AND ENCODER FOR CODING A DIGITAL VIDEO SIGNAL

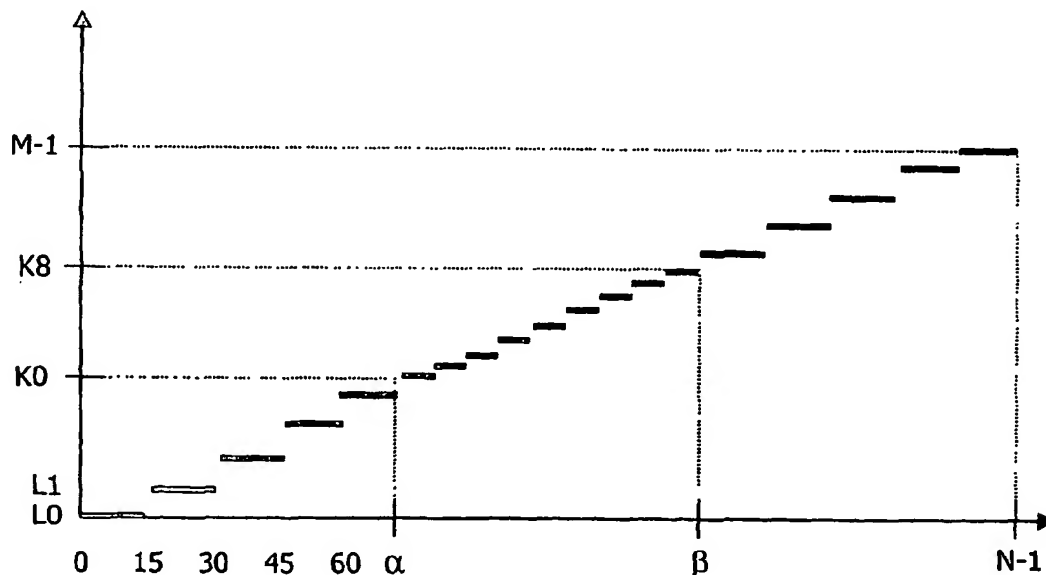

(57) Abstract: The present invention relates to a method and an encoder for coding an input digital video signal comprising a luminance component with luminance values. The method comprises the steps of: - transforming said video sequence from the original spatial representation into fewer representation data comprising transformed luminance values ; - performing a quantization on the representation data so as to obtain a reduced set of data. The invention is characterized in that the quantization step performs a quantization of the luminance component in an adaptive way according to a visible range of transformed luminance values of the luminance component.